



## DETECTION ZONES

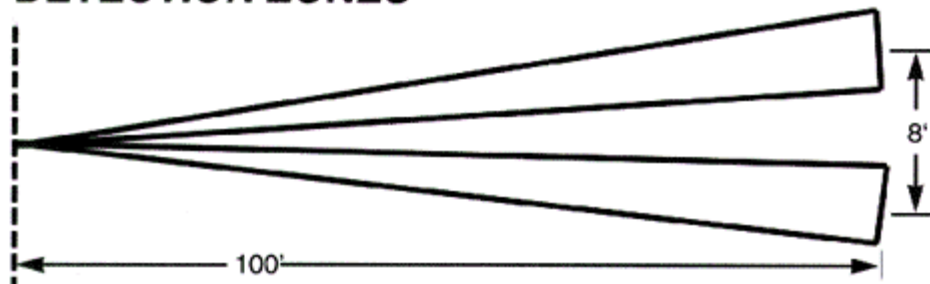

**TOP VIEW** - Intruder must cross A & B zones for trip

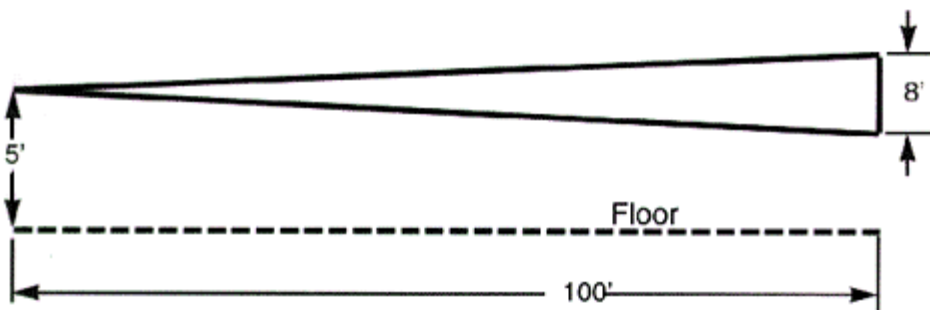

**SIDE VIEW**



- Cast Aluminum Housing

- Wall Mount

- Exterior Dimensions:

10 1/2 in. wide x

7 1/2 in. high x

2 in. deep

**Capacity:** 1-4 oz. can

**Coverage:** Up to 2,000 sq.ft

**Actuation:** Built-in Infrared detector Operates up to 4 years on 8 C-cell batteries

### Electronics:

- Can - out Cycle testing capabilities
- Adjustable entry time delay 0 - 40 sec.
- Non - directional warning horn
- Terminal block for wiring to remote detectors.
- Works independently Unaffected by power outages. No other alarm system needed to operate.
- Battery test light
- Rocker and key switches
- Exit time delay 60 sec.
- 12 volt output for operating additional units.
- The infrared detector uses a two zone concept and intelligent circuitry to protect against false alarms.